LIMITED LIFETIME WARRANTY


Your Dynarex Product is warrantied to be free of defects in materials and workmanship for the lifetime of the product for the original purchaser. This item was built to exacting standards and carefully inspected prior to shipment. This Limited Lifetime Warranty is an expression of our confidence in the materials and workmanship of our products and our assurance to the consumer of years of dependable service.

The Warranty shall not apply under the following conditions:

- · Problems arising from normal wear
- Problems arising from failure to adhere to the product instructions
- Problems arising from misuse, negligence, accident or improper operation, maintenance or storage
- Problems arising from modifications or unauthorized repairs, parts or attachments
- Products where the serial number has been removed or defaced
- Problems with non-durable components, such as rubber accessories, casters, and grips, which are subject to normal wear and need periodic replacement

Dynarex shall not be liable for any consequential or incidental damages whatsoever. Dynarex shall repair or replace defective products at its option. The foregoing warranty is exclusive and in lieu of other express warranties, if any, including the implied warranties of merchantability and fitness of a particular purpose. The remedy for any violation of the implied warranty shall be limited to repair or replacement of the defective product pursuant to the terms contained herein.

If you have a question about your Dynarex device or this warranty, please contact an authorized Dynarex dealer.








SYMBOL GLOSSARY
For an explanation of symbols used in Dynarex packaging, visit dynarex.com/symbols.php

△ WARNING:

Cancer and Reproductive Harm www.P65Warnings.ca.gov


R191213

Manufactured for: Dynarex Corporation 10 Glenshaw Street • Orangeburg, NY 10962 USA • www.dynarex.com

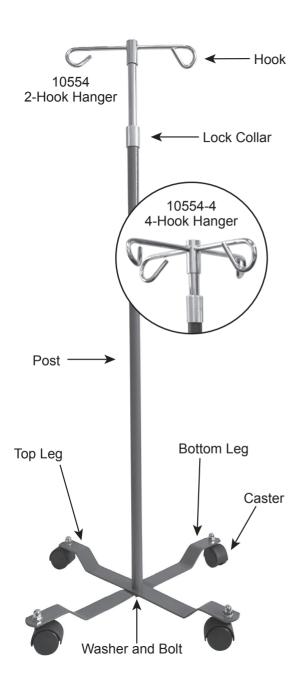

ASSEMBLY INSTRUCTIONS

1. Position the top leg inside the groove in the center of the bottom leg. Ensure the holes are aligned.



- 2. Place washer onto bolt and screw into the bottom of the post until all components are tightly fastened.
- 3. Screw the hook over the top end of the post.
- 4. Adjust the height of your IV Pole and tighten the lock collar.
- 5. Fasten casters to the base with the nut and washer.